
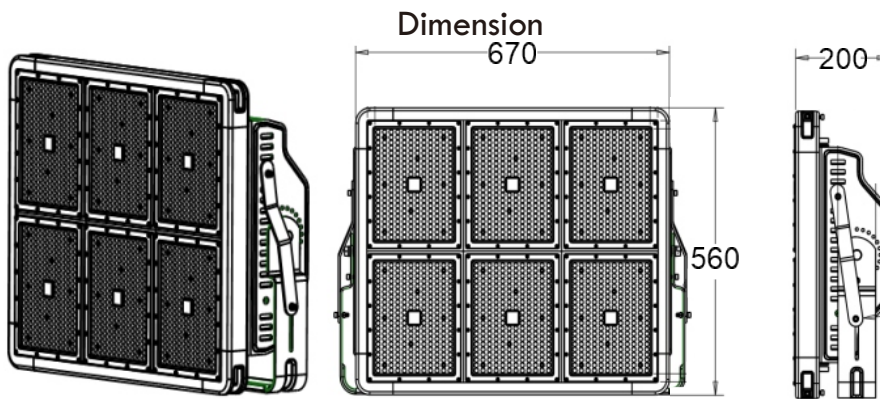



HORI FLOOD LIGHT HLS-FD9 1080W

Power / Daya LED	1000 Watt (-0,+10%)
Efficacy / Kekuatan Cahaya	140 Lm/W ($\pm 5\%$)
Luminous Flux / Lumen Sumber Cahaya	140.000 Lm ($\pm 5\%$)
Operating Voltage / Tegangan Kerja	175 - 265 VAC
Frequency / Frekuensi	50 Hz
Color Temperature / Warna Cahaya	5000°K (4745°K ~ 5311°K)
Power Factor / Faktor Daya (PF)	0,95 ($\pm 5\%$)
THD	<12%
Case Material / Bahan Rumah Lampu	Aluminum Die Cast
Net Weight / Berat Bersih	40 Kg ($\pm 5\%$)
CRI	80 Ra ($\pm 5\%$)
Ambient Temperature / Suhu Lingkungan	-5°C ~ +45°C
Light Beam Angle / Sudut Pencahayaan	60°
Lifetime / Umur Sumber Cahaya	50.000 hours
LED CHIP / Sumber Cahaya LED	Cree
Degree of Protection / Skala IP	IP66
Certificate / Sertifikasi	CE EMC, CE LVD, IP66, LM79, TKDN

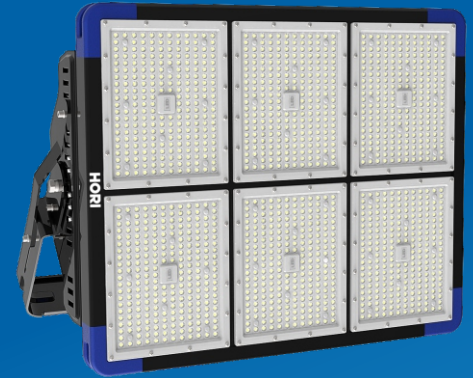


* Toleransi dimensi sesuai dengan ISO/DIS 8062-4.2:2015

Illuminance Distribution Diagram



C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:56.2 Right:55.0
 :C90/270Left:55.2 Right:55.4
 Beam Angle(50%Imax):C0/180Left:30.0 Right:29.2
 :C90/270Left:28.0 Right:28.3

ISO Illuminance Diagram

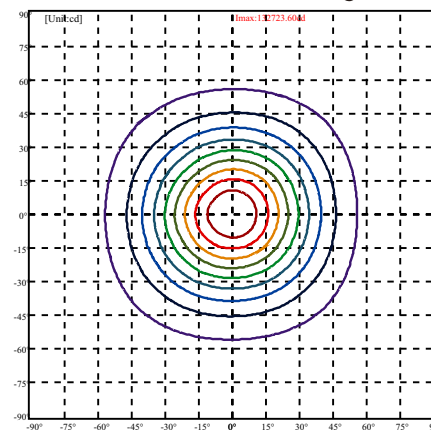

(10%Imax) 13272.4
 (20%Imax) 26544.7
 (30%Imax) 39817.1
 (40%Imax) 53089.4
 (50%Imax) 66361.8
 (60%Imax) 79634.2
 (70%Imax) 92906.5
 (80%Imax) 106179
 (90%Imax) 119451