


HORI LED LIGHT HLS-GL3 40W

Smart Ready

Power / Daya LED	40 Watt ($\pm 5\%$)
Efficacy / Kekuatan Cahaya	145 Lm/W ($\pm 5\%$)
Luminous Flux / Lumen Sumber Cahaya	5.800 Lm ($\pm 5\%$)
Operating Voltage / Tegangan Kerja	175 - 265 VAC
Frequency / Frekuensi	50 Hz
Color Temperature / Warna Cahaya	5000°K (4745°K ~ 5311°K)
Power Factor / Faktor Daya (PF)	0,95 ($\pm 5\%$)
THD	<18%
Case Material / Bahan Rumah Lampu	Aluminum Die Cast
Net Weight / Berat Bersih	5,4 Kg ($\pm 5\%$)
CRI	80 Ra ($\pm 5\%$)
Ambient Temperature / Suhu Lingkungan	-5°C ~ +45°C
Light Beam Angle / Sudut Pencahayaan	Wide Beam (160°)
Lifetime / Umur Sumber Cahaya	50.000 hours
LED CHIP / Sumber Cahaya LED	SZ-TYF
Degree of Protection / Skala IP	IP66
Certificate / Sertifikasi	CE EMC, CE LVD, IP66, LM79, IK09, TKDN
Optional / Pilihan	Dapat Diupgrade ke 70W & 90W




Illuminance Distribution Diagram

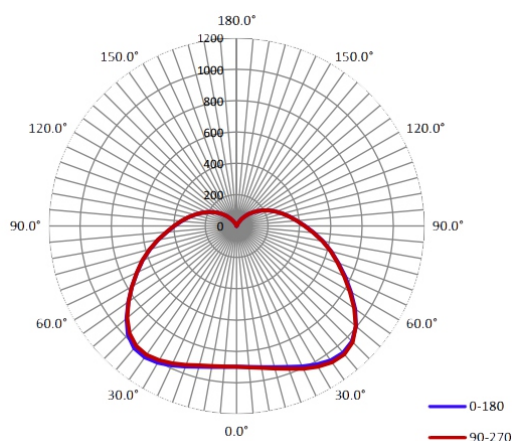

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle(50%I _{max}):	160.9	160.2	159.9	160.3	160.3
Field Angle(10%I _{max}):	267.2	266.7	266.9	267.3	267.0

Dimension

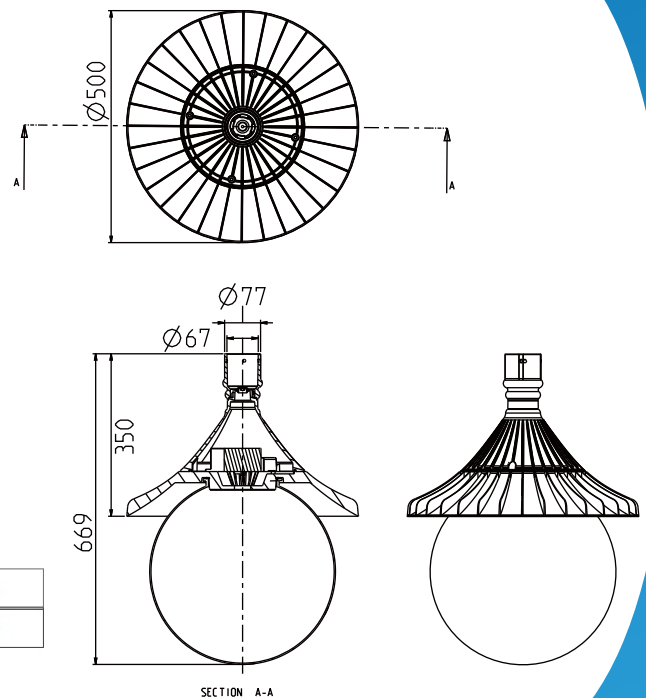

* Toleransi dimensi sesuai dengan ISO/DIS 8062-4.2:2015