
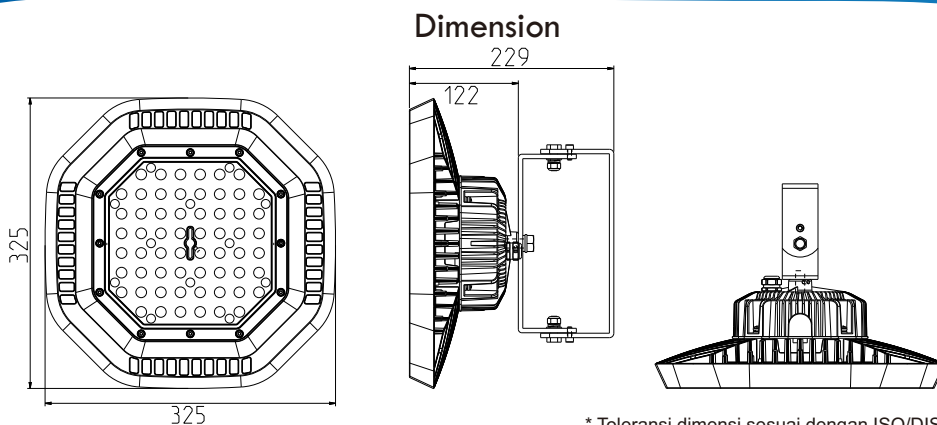



HORI UNDERPASS LIGHT HLS-HM1 120W

Power / Daya LED	120 Watt (-0,+10%)
Efficacy / Kekuatan Cahaya	145 Lm/W ($\pm 5\%$)
Luminous Flux / Lumen Sumber Cahaya	17.400 Lm ($\pm 5\%$)
Operating Voltage / Tegangan Kerja	175 - 265 VAC
Frequency / Frekuensi	50 Hz
Color Temperature / Warna Cahaya	6200°K ($\pm 5\%$)
Power Factor / Faktor Daya (PF)	0,95 ($\pm 5\%$)
THD	<19%
Case Material / Bahan Rumah Lampu	Aluminum Die Cast
Net Weight / Berat Bersih	4,2 Kg ($\pm 5\%$)
CRI	80 Ra ($\pm 5\%$)
Ambient Temperature / Suhu Lingkungan	-5°C ~ +45°C
Light Beam Angle / Sudut Pencahayaan	90°
Lifetime / Umur Sumber Cahaya	50.000 hours
LED CHIP / Sumber Cahaya LED	Cree
Degree of Protection / Skala IP	IP66
Certificate / Sertifikasi	CE EMC, CE LVD, IP66, LM79, IK09, TKDN

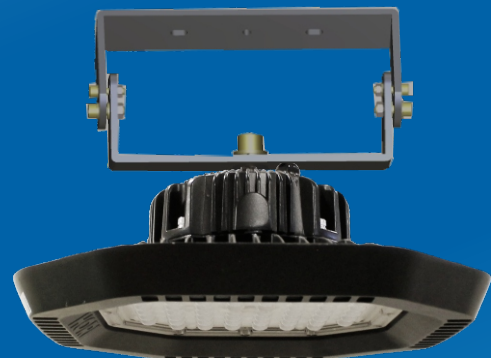


* Toleransi dimensi sesuai dengan ISO/DIS 8062-4.2:2015

Illuminance Distribution Diagram

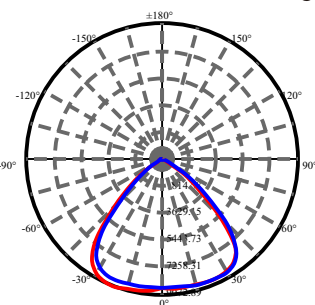

C0/C180: 37.4
C90/C270: 35.7
Field angle(10%Imax):C0/180Left:37.4 Right:79.3
:C90/270Left:81.2 Right:35.7
Beam Angle(50%Imax):C0/180Left:24.8 Right:67.0
:C90/270Left:68.8 Right:23.8

ISO Illuminance Diagram

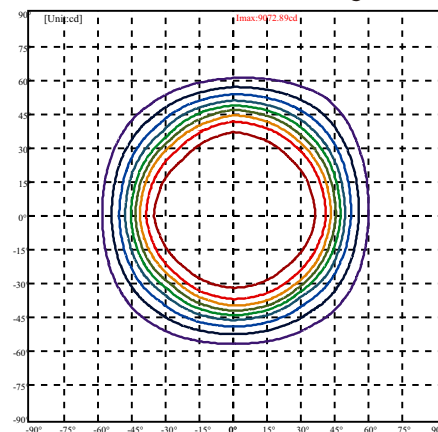

(10%Imax) 907.289
(20%Imax) 1814.58
(30%Imax) 2721.87
(40%Imax) 3629.15
(50%Imax) 4536.44
(60%Imax) 5443.73
(70%Imax) 6351.02
(80%Imax) 7258.31
(90%Imax) 8165.6