


HORI STREET LIGHT HLS-LDL-1 D 120W

Intelligent Dimming & Smart Ready

Power / Daya LED	120 Watt (-0,+10%)
Efficacy / Kekuatan Cahaya	130 Lm/W ($\pm 5\%$)
Luminous Flux / Lumen Sumber Cahaya	15.600 Lm ($\pm 5\%$)
Operating Voltage / Tegangan Kerja	175 - 265 VAC
Frequency / Frekuensi	50 Hz
Color Temperature / Warna Cahaya	5000°K (4745°K ~ 5311°K)
Power Factor / Faktor Daya (PF)	0,95 ($\pm 5\%$)
THD	<17%
Case Material / Bahan Rumah Lampu	Aluminum Die Cast
Net Weight / Berat Bersih	6,4 Kg ($\pm 5\%$)
CRI	70 Ra ($\pm 5\%$)
Ambient Temperature / Suhu Lingkungan	-5°C ~ +45°C
Light Beam Angle / Sudut Pencahayaan	Wide Beam (145°)
Lifetime / Umur Sumber Cahaya	50.000 hours
LED CHIP / Sumber Cahaya LED	Cree
Degree of Protection / Skala IP	IP66
Certificate / Sertifikasi	CE EMC, CE LVD, IP66, LM79, IK09, TKDN




Dimension

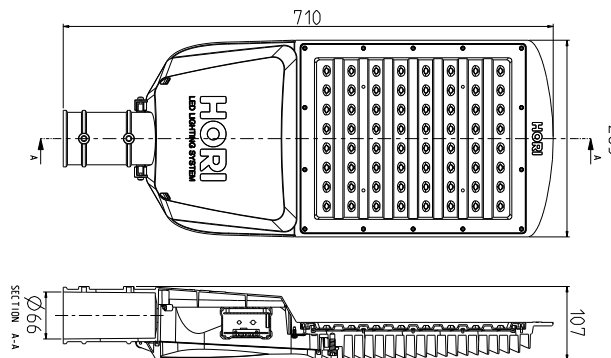

* Toleransi dimensi sesuai dengan ISO/DIS 8062-4.2:2015

Illuminance Distribution Diagram

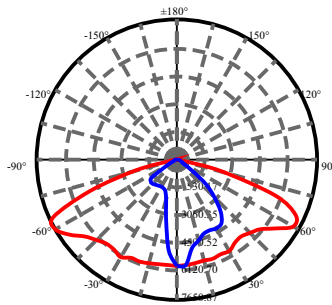

C0/C180: —
 C90/C270: —
 Field angle(10%Imax):C0/180Left:18.9 Right:138.9
 :C90/270Left:61.9 Right:58.9
 Beam Angle(50%Imax):C0/180Left:12.2 Right:132.9
 :C90/270Left:12.1 Right:45.0

ISO Illuminance Diagram

